


# KLETON

## QUICK LINK CHARACTERISTICS

- Multi-purpose connector
- Popular design used to repair and replace broken links and chains
- Working load limit (WLL) stamped on each piece
- Not approved for climbing applications
- Manufacturer's Warranty: 1 Year Limited
- Material: Zinc Plated Steel

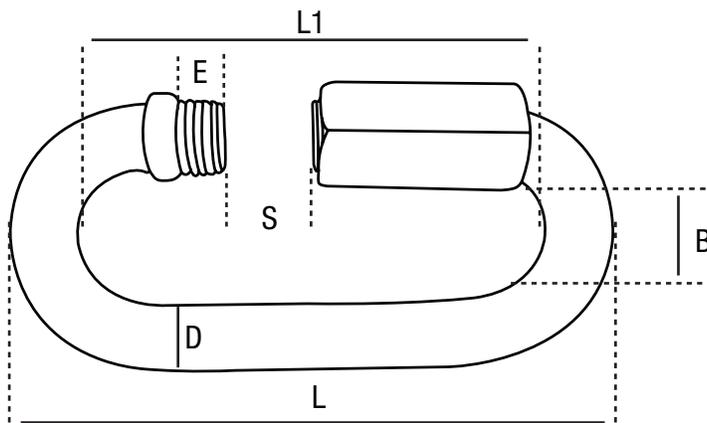

LW266

## Imperial (in)

| Model No. | Working Load Limit lbs. | Size Diameter (D) | Length (L) | Inner Length (L1) | Eye Internal Diameter (B) | Opening Size (S) | Thread Length (E) | Weight lbs. |
|-----------|-------------------------|-------------------|------------|-------------------|---------------------------|------------------|-------------------|-------------|
| LW266     | 220                     | 1/8"              | 1-1/2"     | 1-3/16"           | 7/16"                     | 1/4"             | 1/8"              | 0.018       |
| LW267     | 660                     | 3/16"             | 2"         | 1-5/8"            | 9/16"                     | 5/16"            | 3/16"             | 0.045       |
| LW268     | 880                     | 1/4"              | 1-1/4"     | 1-13/16"          | 5/8"                      | 5/16"            | 3/16"             | 0.069       |
| LW269     | 1760                    | 5/16"             | 3"         | 2-3/8"            | 11/16"                    | 1/2"             | 1/4"              | 0.159       |
| LW270     | 2140                    | 3/8"              | 3-9/16"    | 2-13/16"          | 13/16"                    | 1/2"             | 5/16"             | 0.279       |
| LW271     | 3300                    | 1/2"              | 4-3/16"    | 3-5/16"           | 15/16"                    | 5/8"             | 5/16"             | 0.463       |

## Metric (mm)

| Model No. | Rated Capacity (kg) | Size Diameter (D) | Length (L) | Inner Length (L1) | Eye Internal Diameter (B) | Opening Size (S) | Thread Length (E) | Weight (g) |
|-----------|---------------------|-------------------|------------|-------------------|---------------------------|------------------|-------------------|------------|
| LW266     | 100                 | 3.2               | 37.5       | 30.5              | 10.5                      | 5.5              | 3.5               | 8.2        |
| LW267     | 300                 | 4.8               | 51.8       | 42.5              | 13.7                      | 8                | 4.5               | 20.4       |
| LW268     | 400                 | 6.4               | 57.8       | 46.5              | 15                        | 7.7              | 4.8               | 31.1       |
| LW269     | 798                 | 7.9               | 76         | 61                | 18.2                      | 13.2             | 6.5               | 72.3       |
| LW270     | 970                 | 9.5               | 90.5       | 71                | 21                        | 13.5             | 8                 | 126.7      |
| LW271     | 1497                | 12.7              | 106.8      | 84                | 23.5                      | 15.7             | 8                 | 210        |

KLETON®

22555 Aut. Transcanadienne, Senneville, Quebec H9X 5X5

Phone: (866) 457-1163 Fax: (866) 457-1164

www.kleton.com info@kleton.com