

CUSTOM STRIP DOORS

In some applications strip curtain door kits can not be used. However, custom doors can be designed to fit your application. Generally strip curtain material is available in 8" and 12" standard and low temperature versions. Commonly used mounting hardware includes universal mount aluminum angle, straight roller track and hinged roller track. For special applications the "ordering information" provided will help you determine the type of system you will require. Our customer service representatives are also available, should you require any assistance. Please call for special pricing whenever square footage is required.


ORDERING INFORMATION

- 1) Determine the type of mounting system required: angle mount or sliding door. Other custom doors can be designed.
- 2) Choose overlapping requirement based on the location and type of traffic involved.
- 3) Measure door opening giving proper allowances for the type of mounting system.
- 4) Calculate approximate amount of square feet required.

OVERLAPPING METHODS

Overlapping with Kleton custom doors offers three basic overlap methods. With holes on 1" centres, almost any overlap is possible. Our standard doors under 6' x 8' use 1/2 overlap. Doors over 8' x 8' use 2/3 overlap.

1/2, 2/3 overlap are the most common and are recommended for moderate temperature differential and personnel equipment passage. Full overlap is recommended for large temperature differentials and light winds, also ideal for noise control and doors in excess of 12' high.




FIXED MOUNTING SYSTEM

Universal aluminum angle mount can be used for both wall or lintel mount applications. Measure door opening, for wall mount add 6", lintel mounts use exact dimension. Angle comes in 4' sections, please indicate if a solid one length angle is required. All hardware included.

Model No. KF001 Aluminum Angle Per 4 ft. Complete
Price/Each \$

SLIDING STEEL DOOR MOUNT

Strips are attached to a trolley assembly. The mechanism enables removal of strip material from door opening. Allowing unobstructed traffic movement. The "curtain-like" structure can be parted on either side or in the middle. Allow sufficient wall space on either side of door as needed. Track available in 5' or 10' lengths, cut lengths available. Trolley assembly available in 2' and 3' length with steel wheels, all trolleys interconnect. Also available in hinged roller track for curved door systems.

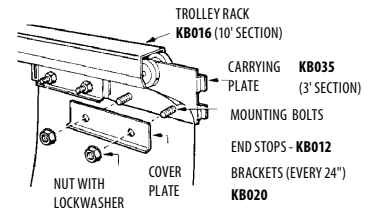

Model No.	Description	Price /Each
KB016	Roller Track 10'	
KB017	Roller Track 5'	
KB034	Roller Assembly 2' Steel Rollers	
KB035	Roller Assembly 3' Steel Rollers	

Model No.	Description	Price /Each
KB033	Hinged Trolley 1' Section	
KB012	Track End Stop	
KB020	Track Mounting Bracket/Coupler	
KB036	4' Pull Rope	

Note: Special sizes available.

THE GUARDIAN® SCATTER-FREE GLUEBOARD FLYTRAPS

- Lure flies and other pesky flying insects with a UV black light lamp to sticky glueboards
- Discreetly concealed in the front of the unit
- Capture and containment is invisible and silent
- Equipped with T8 diameter (energy efficient) lamps and 6' (1.83 m) electric cord
- Units may be either wall mounted or set to stand alone
- For best results the attraction lamp should be directly visible to an insect's flight path
- Continuous (24 hour) use is recommended
- Ideal for areas where other insect control devices are inadequate or not allowed:
 - Dining rooms/cafeterias/lunchrooms
 - Kitchens/deli prep
 - Fast food operations
 - Supermarket deli's/bakeries/meat, produce and seafood departments
 - Hospitality service areas
 - Waiter/wash stations
 - Testing laboratories
 - Veterinaries/small animal surgery
- Includes four glue boards
- Sand beige textured steel
- FDA accepted



ND248



Model No.	Mfg. No.	Description	Price /Each
ND248	GE18	Flytrap 18-1/4" W x 5-1/4" D x 5-1/4" H	
ND249	GE36	Flytrap 36-1/2" W x 5-1/4" D x 5-1/4" H	
ND250	GB4-12	Glueboards, 12 pack	
ND252	18	Replacement T-8 black Light for ND248	
ND253	36	Replacement T-8 black Light for ND249	

SERIES 7194E VERTICAL WALL MOUNT INSECT LIGHT TRAPS

- Ideal for warehouses, between loading docks, high traffic corridors
- Energy efficient-equipped with electronic ballasts and T8 diameter lamps reduce average electrical consumption by 26% to 40%
- Overall light out is increased 8% to 15% per lamp
- Power input: 110/120 V
- Power output: 4000 V
- Includes 3-36" T8 black light insect attraction lamps
- Internal metal insect collection drawer
- 3-wire ground cord and plug
- Rear keyhole slots for wall mounting
- Available in stainless steel or aluminized construction
- Unit dimensions: 16" W x 5-1/4" D x 45-1/4" H
- Note: Unit must be grounded
- ETL approved



NE484



Model No.	Mfg. No.	Description	Price /Each
NE483	7194EDGA	Aluminized Steel	
NE484	7194EDGS	Stainless Steel	
ND253	36	Unfiltered T-8 Bulb	
NE487	36B	Filtered T-8 Bulb	