

PORTABLE DRILL PRESSES



1-5/8" ELECTROMAGNETIC DRILL KIT

- Optimized cutting & drilling speeds
- Magnetic deadlift (1") 1800 lbs. Auto-Stop function
- Carrying Handle
- Auto-stop lift-off detection
- Tool free feed-handle LED light
- Feed handle can be changed from the left or right side of the tool
- Includes: 1-5/8" Electromagnetic Drill, Lubrication Spray Bottle, 1/2" Chuck Adapter, Chuck Key, (2) 1" Retractable Pilot Pins, Safety Strap & Carrying Case

Model No. TYP028
Mfg. No. 4272-21
Price/Each \$

SPECIFICATIONS

Amperage:	13 A
Drill Capacity:	1-5/8"
No Load RPM:	475/730
Drill Point Pressure:	600 lbs.
Drill Travel:	5-3/4"
Tool Weight:	30.0 lbs.



1/2" ADJUSTABLE POSITION ELECTROMAGNETIC DRILL PRESSES

- Solid state electronic switching
- Feedback speed control
- Line Lock-Out prevents tool from operating should voltage be restored to an interrupted line

Model No. TF318
Mfg. No. 4204-1
Price/Each \$

SPECIFICATIONS

Amperage:	7.2
Drill Capacity:	1/2"
No Load RPM:	600
Drill Point Pressure:	1650 lbs.
Drill Travel:	9"
Tool Weight:	57.0 lbs.



3/4" FIXED POSITION ELECTROMAGNETIC DRILL PRESSES

- Solid state electronic switching
- Feedback speed control
- Line Lock-Out prevents tool from operating should voltage be restored to an interrupted line

Model No. TF322
Mfg. No. 4210-1
Price/Each \$

SPECIFICATIONS

Amperage:	12.5
Drill Capacity:	3/4"
No Load RPM:	350
Drill Point Pressure:	1670 lbs.
Drill Travel:	9"
Tool Weight:	62.0 lbs.



3/4" ADJUSTABLE POSITION ELECTROMAGNETIC DRILL PRESSES

- Solid state electronic switching
- Feedback speed control
- Line Lock-Out prevents tool from operating should voltage be restored to an interrupted line

Model No. TF319
Mfg. No. 4206-1
Price/Each \$

SPECIFICATIONS

Amperage:	12.5
Drill Capacity:	3/4"
No Load RPM:	350
Drill Point Pressure:	1670 lbs.
Drill Travel:	11"
Tool Weight:	70.0 lbs.




1 1/4" ADJUSTABLE POSITION ELECTROMAGNETIC DRILL PRESSES

- Solid state electronic switching
- Feedback speed control
- Line Lock-Out prevents tool from operating should voltage be restored to an interrupted line

Model No. TF320
Mfg. No. 4208-1
Price/Each \$

SPECIFICATIONS

Amperage:	12.5
Drill Capacity:	1 1/4"
No Load RPM:	500/250
Drill Point Pressure:	1600 lbs.
Drill Travel:	11"
Tool Weight:	72.0 lbs.

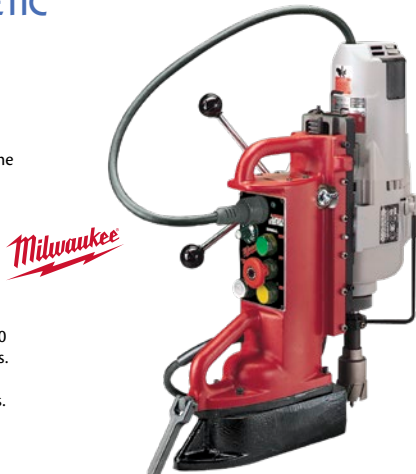

1 1/4" ADJUSTABLE POSITION ELECTROMAGNETIC DRILL PRESSES

- Solid state electronic switching
- Feedback speed control
- Line Lock-Out prevents tool from operating should voltage be restored to an interrupted line

Model No. TEA125
Mfg. No. 4209-1
Price/Each \$

SPECIFICATIONS

Amperage:	12.5
Drill Capacity:	1 1/4"
No Load RPM:	750/375
Drill Point Pressure:	1600 lbs.
Drill Travel:	11"
Tool Weight:	72.0 lbs.

