

MAGNETS

MAGNETIC STRIPS

- Conforms to any contour
- Holds many times its weight
- Can be cut, drilled or shaped
- Available with or without adhesive backing



MAG-MATE™

Thick"	Width"	Length'	Max. Pull per Lin. Ft. (lbs.)	Model No. w/o Adhesive	Price /Roll	Model No. w/Adhesive	Price /Roll
1/32	1/2	200	2	TGY640		TGY648	
1/32	3/4	200	3	-		TGY649	
1/32	1	100	4	TGY642		TGY650	
1/32	1	200	4	TGY643		TGY651	
1/16	1/2	100	3	TGY644		TGY652	
1/16	3/4	100	5	TGY645		TGY653	
1/16	1	50	6	TGY646		TGY654	
1/16	1	100	6	TGY647		TGY655	

VERTICAL LUG ADAPTER FOR RARE EARTH ADVANTAGE LIFT™ MAGNETS

- Adapter for "on/off" permanent rare earth lift magnet
- Locking lifting bail(s) prevents accidental load release during lift
- Lifts flats both horizontally and vertically with Vertical Lift Bail
- 3:1 design factor
- ASME B30.20 BTH-1 Design Category B Service Class 3
- For Use With: AL0500 & AL1000 Magnets
- Operating Temperature Range: -10°F (-23°C) to 180°F (82 °C)



UAV702

MAG-MATE™

Model No.	Mfg. No.	Dimensions L" x W" x H"	Bail Thickness"	Bail Height"	Bail Width"	Price /Each
UAV701	ALLUG1	4-11/16 x 4-3/8 x 3-9/16	1/2	1-7/8	1-1/2	
UAV702	ALLUG2	5-3/4 x 5-3/4 x 4-3/4	5/8	2-7/32	1-3/4	

ADVANTAGELIFT™ RARE EARTH LIFTING MAGNET

MAG-MATE™

- Handle moves laterally instead of pulling, pressing buttons or levers
- Locking lifting bail(s) prevents accidental load release during lift
- Recessed (protected) labels for extended life
- Lifts flats both horizontally and vertically with Vertical Lift Bail
- RFID Enabled with embedded RFID chip
- Supports custom pole shoes (1/4"-20 Tapped Holes, 1/2" deep)
- Swiveling Lift Bail(s)
- Operating temperature range of -10°F (-23°C) to 180°F (82 °C)
- 3:1 Design Factor
- ASME B30.20 BTH-1 Design Category B Service Class 3




UAV698

Model No.	Mfg. No.	Strength lbs.	Dimensions L" x W" x H"	Price /Each
UAV698	AL1000	1000	13-1/4 x 5-7/16 x 4-5/8	
UAV699	AL1500	1500	13-5/16 x 6-7/8 x 6	
UAV700	AL2000	2000	16-5/16 x 6-7/8 x 6	

MAGNETIC TOOL HOLDERS

- Mount to walls, work benches, ladders, etc.
- 3/16" mounting holes and screws provided
- **TLY308** and **TLY309**: holes on 16" centres
- Holds a 10-lb. hammer!




MAG-MATE™

Model No.	Thickness"	H"	L"	Pull lbs.	Wt. lbs.	Price /Each
TLY307	1 1/8	2	12	120	2.0	
TLY308	1 1/8	2	18	180	3.0	
TLY309	1 1/8	2	24	240	4.0	

TELESCOPIC MAGNETIC RETRIEVERS

- Ideal for reaching behind, underneath or around machinery and/or difficult to reach areas
- Rare earth magnet material
- Max. temperature of 180° F (82° C)

MAG-MATE™

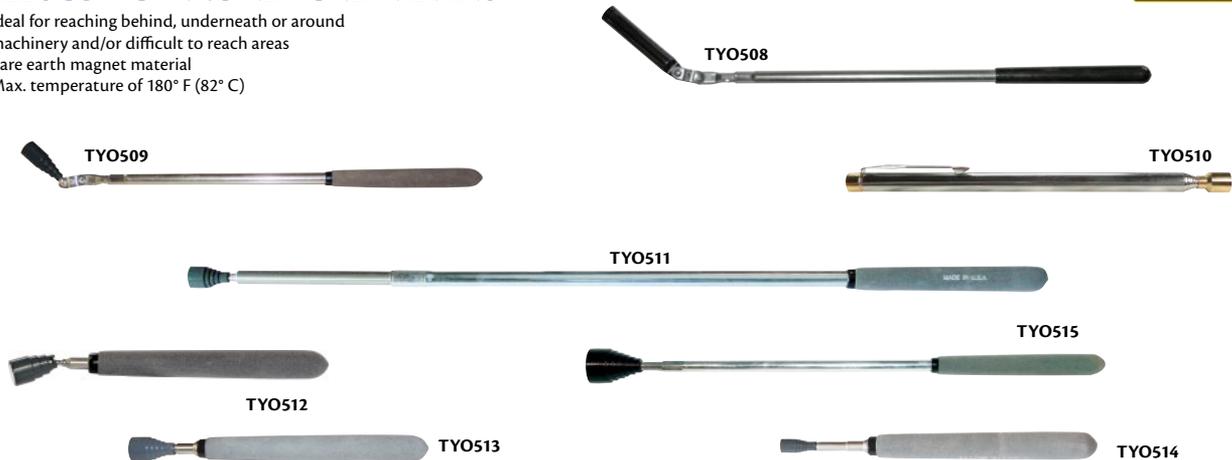

TYO509

TYO508

TYO510

TYO511

TYO515

TYO512

TYO513

TYO514

Model No.	Mfg. No.	Strength lbs.	Diameter"	Length"	Extended Length"	Weight lbs.	Price /Each
TYO508	927	7.5	1/2	17	26 1/2	0.36	
TYO509	931	12	1/2	13	26	0.44	
TYO510	240N	2	5/16	51/2	25 1/2	0.07	
TYO511	926	14	5/8	23 1/2	50	0.42	
TYO512	925	7	5/8	8	35	0.19	
TYO513	923	5	3/8	6 1/2	32	0.14	
TYO514	924	7	5/8	6 1/2	32	0.18	
TYO515	990SM	20	1 1/8	16 1/2	29	0.65	